

**CITY OF SEATAC FIRE DEPARTMENT
QUARTERLY LADDER TASK PERFORMANCES**

QUARTER CODE: 1503 _____ DATE: _____ HOURS: _____ METHOD: _____ LOC: _____ SHIFT: _____


1. 35' Extension Only 2:30 2. 35' Extension with Roofer 3:15

Evolution #	Butt Person	Tip Person	Time	Penalty Time	Total Time

Procedure – Review back of this form time penalties and Department Ladder Manual for position check sheet and general guidelines. Each member must complete 2 evolutions per quarter, one as the Tip Person and one as the Butt Person.

Evolution – The apparatus will be positioned approximately 100' from the building to be laddered. The evolution will start with the members sitting in the jumpseats with SCBA donned in the standby mode. Time starts when the crew is signaled to begin. Time will end when the person in charge of the raise claps their hands together after the ladder is properly positioned and secured. **All ladders used during the drill shall be inspected at the completion of the drill. (WAC 296-305-06005(5)(6)).**

Ladder Inspection Check List - WAC 296-305-06005(6)	OK	Needs Repair
1. Rungs – Welds, Damage, Weakness, Cracks		
2. Beams – Welds, Rivets, Damage, Heat or Overloading Deformation		
3. Bolts/Rivets – Tightness		
4. Butt Spurs – Excessive wear, Other defects		
5. Halyards/Cables – Wear, Fraying, Hardware for wear/proper operation		
6. Heat Sensor – Presence, Change indicating exposure to heat		

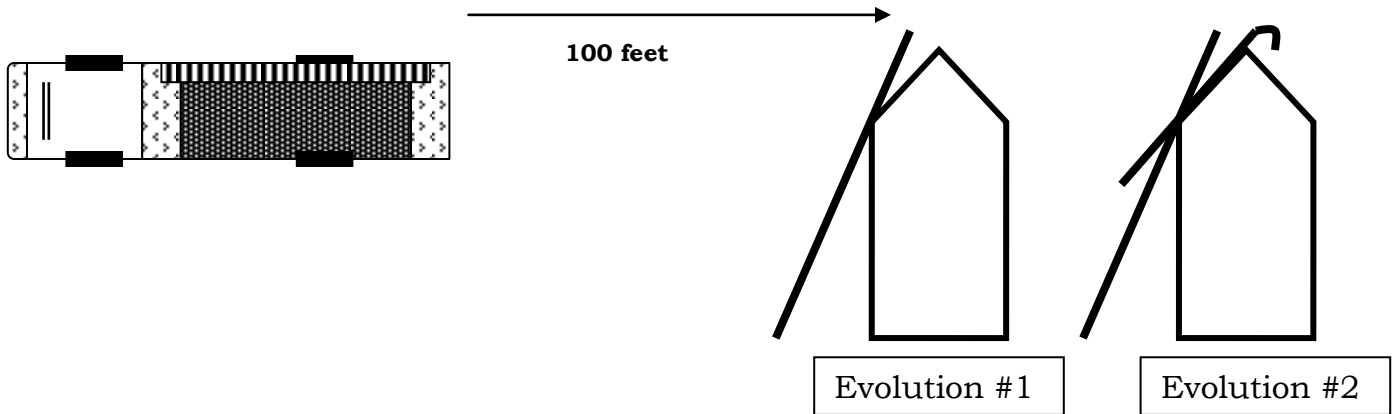

Roster

Employee Number	Name (Printed)	Name (Signature)

**CITY OF SEATAC FIRE DEPARTMENT
QUARTERLY LADDER TASK PERFORMANCES**

Penalties

“Ladder’s Clear” Prompt not stated or repeated	15 sec
Roof ladders not placed away from apparatus	15 sec
Proper climbing angle not achieved (major adjust necessary)	30 sec
Proper footwork to anchor/foot ladder not completed	30 sec
All dogs not locked prior to climbing	Fail
Check for overhead wires/obstructions not performed	30 sec
Any missed command/step	5 sec
Any other unsafe act	30 sec
Ladder Inspection not completed	Fail